


APPLICATION :

Approval SPS EDF-RTE

- **PRICKING** to check and ensure the absence of tension on EHV (max 220kV.) underground single phase cables with max. core size 1600 mm² al and cu .

Set delivered in a case with an other steel pike, one 12V battery and associated one-hour fast charger

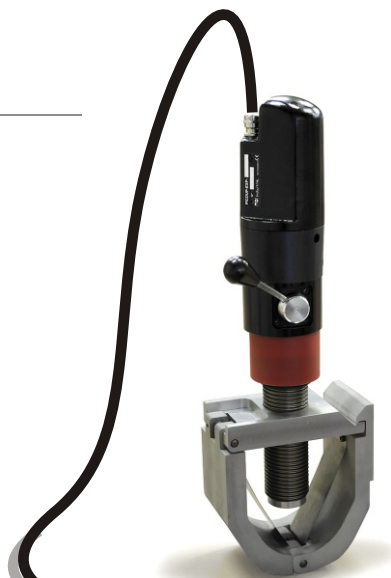


HYDRAULIC PRICKING-PIERCING - HEAD

Ref : PCH51

Composed of :

- Dual-stage hydraulic jack with quick manual approach to position and secure the PCH 51 on the cable .
- High strength heat treated pike achieving the pricking of the cable .
- Spring-loaded cradle for stable centering of the tool on the cable.
- Integrated hydraulic pump 700 bars.
- Capacity : max cable Ø 140 mm (measured on overall insulation)
- Dimensions: 640 x 210 x 330 mm
- Weight 7,5 Kg.

5 meters

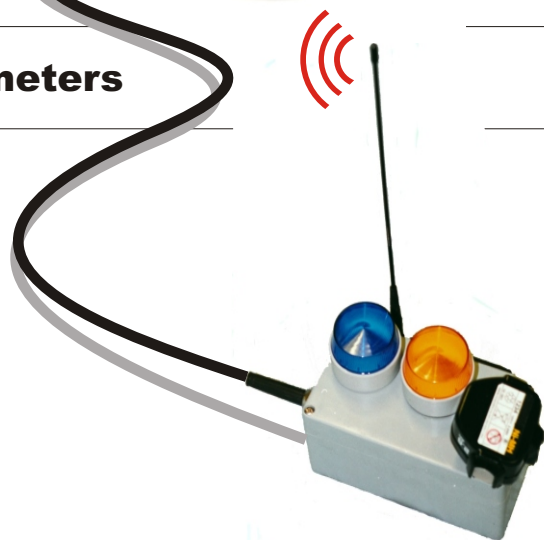

CASE REMOTE CONTROL with radio code (fréquency 433,92 Mhz)

Ref. : PCCH240I-BT-CSF

- The case remote control is connected to the pricking and cutting tool with an electrical wire of 5 meters long.
- 1 Flash indicates the stand by of the case remote control.
- 1 Siren indicates the good accomplishment of the operation and the end of it.
- The tool is working thanks to the battery connected on this case.



WIRELESS hand case with 2 buttons (433,92 Mhz)

Réf. : PCCH240:38

- is working with a 9 V battery.
- radio code - can be used up to 25 meters.

non contractual document